

TM uFace 800

Upgraded Face Template Capacity and Performance




Using the latest platform and algorithms, **uFace800** can hold up to 1,200 face templates and 2,000 fingerprint templates. Supporting multiple authentication methods including face recognition, fingerprint, password, RFID card (and combinations), the **uFace800** is ready for integration into the most demanding applications. Communication options include serial/RS485, Ethernet, USB host, and optional Wi-Fi. An available 2000 mA battery allows system operation during loss of power events.

Features

- Capacity: 1,200 face templates and 2,000 fingerprint templates
- Authentication methods: Face, Fingerprint, RFID and/or Password
- Elegant ergonomic design
- Intuitive touch screen GUI
- · Optional built-in backup battery provides approx. 4 hours of continuous operation
- Optional Wi-Fi for wireless network connection
- Built-in interfaces for use within access control applications

Installation

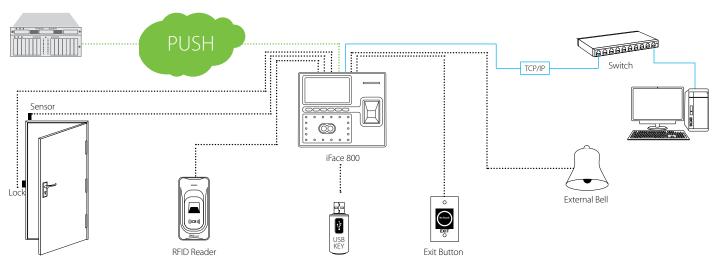

Specifications

Display

800 x 480 Pixel, LCD Capacitive Touch Screen

Veri ication Speed ≤1 sec (typical)

Fingerprint Sensor ZK Optical

Supported Options 2000 mAh Backup Battery, Prox, Mifare

Part Number

TM UFace 800

Camera High Resolution Infrared Camera

Capacity Face: 1,200(1:N) Fingerprint: 2,000 ID Card: 10,000 Transaction: 100,000

Communications

Data: Ethernet, RS232 / 485, (Optional: Wi-Fi) Interface: USB Host, Wiegand Ports Output Only Power 12V DC at 3A

Environment

Operating Temperature: 32° F - 113° F (0° C - 45° C) Operating Humidity: 20% - 80%

Dimension

Width: 7.6 in. (19.3 cm) Height: 5.5 in. (13.97 cm) Depth: 3.75 in. (9.52 cm) Net Weight: 1.4 lbs. (635 g)

What's in the Box



iFace800








Measuring Tape



Diode





Installation Template



Back Plate

BackUp Battery





Design and Specifications subject to change without notice

www.sierraws.com

Sierra Workforce Solutions 620 Coolidge Drive, Suite 190 Folsom, CA 95630 916-673-2160

Network Cable

sales@sierraws.com