

TM 15 C Data Collection Terminal

Choice of Proximity, Barcode, Magnetic Stripe or Fingerprint Reader in a compact design









Magnetic



TM15C-ID Fingerprint reader



TM15CR Proximity card reader

TM15C-B Barcode card reader




TM15C-MAG Magnetic card reader

Standard Function

- Wi-Fi as a standard feature on all devices
- User friendly UI and menu system design
- Hardware level clock authentication
- Support for local and external data/system backup
- User level duplicate punch prevention
- Tip entry support
- Multiple level job code support
- Customizable user access control privileges
- Enhanced network security
- · Web server support as a standard function

- Automatic status key switch
- Self-Service API
- 9 Digits User ID
- Daylight savings time
- Customizable bell schedules
- Private or public SMS messaging support
- USB-host
- User Attendance search
- PUSH and Standalone SDK compatibility with TFT 2.0
- Enhanced encryption system for data integrity and security
- © C opyright 2022. ZK Technology LLC. Dba. ZKTeco. ZKTeco Logo is a registered trademark of ZKTeco or a related company. All other product and company names mentioned are used for identification purposes only and may be the trademarks of their respective owners. All specifications are subject to change without notice. All rights reserved.

Installation

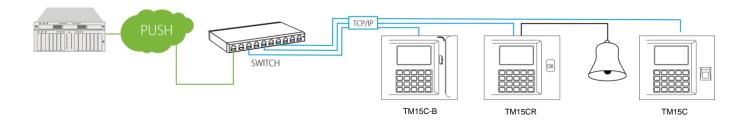

Specifications

Capacity

ID Cards: 10,000 Transactions: 100,000 Fingerprint templates: 3,000

Fingerprint Sensor ZK2750P

Display

3.0 in. TFT Color Screen Communications RS232 , Ethernet, USB-Host, Wi-Fi

Power

12 V DC, 1.5 A Optional: 12V POE injector (sold separately) Optional: 12V Battery Backup (sold separately)

Environment

Operating Temperature: 32° F to 113° F (0° C to 45° C) Operating Humidity: 5% to 80%

Supported Devices

TM15C-ID Fingerprint and standard RFID prox reader TM15C-HID Fingerprint and HID prox reader TM15C-MAG Magnetic card reader TM15C-B Barcode card reader TM15CR Standard RFID prox reader TM15CR-HID Standard HID prox reader

Dimensions

Width : 6.5 in. (16.5 cm) Height: 5.5 in. (14 cm) Depth: 1.8 in. (4.6 cm) Weight: 0.95 lbs. (0.43 kg)







What's in the Box







US15C

Mounting Plate

AC Power Adapter External Relay Connectors

Serial Cable

Network Cable

Screws, anchors & Screwdriver ID card



Design and Specifications subject to change without notice

Sierra Workforce Solutions

705 Gold Lake Dr. Suite 210 Folsom, CA 95630 +1 916-673-2165 sales@sierraws.com | sierraws.com